

COBRA PLUS



SPECIFICATIONS

The Cobra Plus maintains efficient AC Emergency Power to operate all emergency lighting fixtures at "full-light" output, after the transfer is complete, providing superior dependability and security to commercial/industrial environments in a small footprint.

POWER RATING

- 2.4 KW - 4.2 KW (or 2,400 Watts - 4,200 Watts) single phase output unit uses the latest DSP/PWM technology to provide the most advanced performance and reliability features

INPUT

- 120V, 208V, 240V, 277V or 480V input 60Hz

OUTPUT

- 120V, 208V, 277V, 480V, 120/240 or 120/277VAC output 60Hz. Stand-by design is ≥99% efficient at 100% linear load

BATTERIES


- Sealed, maintenance-free, lead calcium (AGM) batteries
- 10-Year prorated warranty
- DSP/PWM Smart Battery Monitoring System is **TEMPERATURE COMPENSATED** maintaining maximum runtime and battery life
- Microprocessor controlled recharge and DSP/PWM overcharge protection standard

LAMPS AND LOADS

- Emergency power provides **FULL LIGHT OUTPUT** from all lamps and fixtures for the entire runtime
- Operates fluorescent, compact fluorescent, incandescent, quartz, LED and other lamp types
- Standard or electronic ballasts, dimming devices or panels, sensors and most control equipment
- Standard or LED Exits and other safety equipment

CODES

- Listed to UL 924, meets NFPA 101, NFPA 70, NEC and OSHA standards
- Cities of Chicago and New York approved
- Complies with the Buy American Act

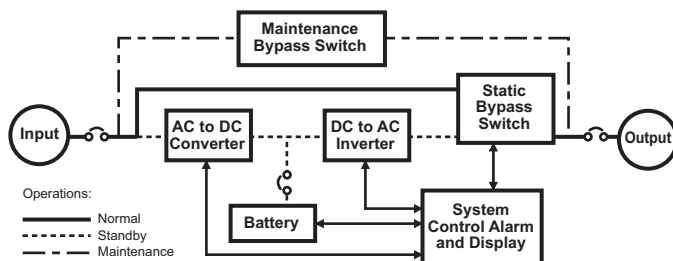

Catalog Number	
Project	Notes
Signature	Date

2.4 KW - 4.2 KW

Single Phase

**Stand-By
Emergency
Lighting and
Power
Systems**



PROTECTION

- Provides overload, surge and undercurrent protection using DSP/PWM technology and DSPM Watchdog Software to protect system performance and reliability
- Transfer in 16msec - 60msec

DIAGNOSTICS AND MAINTENANCE

- DSP/PWM technology and DSPM Watchdog Software provides complete self diagnostic capabilities and LED Monitoring
- Informative advanced Display and Alarms keep you in control of your emergency lighting environment 24/7
- Automatically performs periodic self-tests ensuring a safely lighted environment *prior* to an emergency
- Single point of testing instead of multiple testing points with battery packs

CABINET

- Space saving small footprint
- Modular design enables flexible installation

INSTALLATION

- Modular design and small footprint allow easy installation in electrical closet or other convenient locations
- Phone assisted factory start-up standard for all systems
- Extended warranty available

SPECIAL APPLICATIONS

- DSPM offers numerous UL924 optional devices to meet unusual or difficult application parameters
- ECM - Environmental Circuit Module allows fixtures and lamps on the emergency circuit(s) to be operated by normal switching and/or dimming devices in NON-emergency conditions
- Dimming Panel Interface allows use with emergency lights controlled by common dimmer panel

WARRANTY

- 1-Year full warranty on system electronics
- Battery warranty 1-year with 9-years pro-rated
- System 1-year on-site warranty labor with DSPM phone assisted start-up
- 5-Year powertrain warranty
- Maintenance contracts available



Cobra Plus Series	Power Rating	UPS Cabinet Dimensions			Weight (lbs)	British Thermal Unit (BTU's)	Battery Type	Voltage (VAC)		Output Protection	Safety Approvals
		W	H	D				Input	Output		
CPLUS	KVA/KW						Sealed, Maintenance free (AGM) lead calcium			Input and output circuit breakers standard	UL924 NFPA 101 NFPA 70 NEC
	2.4	26"	44"	26"	700	81.6		<i>Select</i> 120,	<i>Select</i> 120, 208,		
	2.6	26"	44"	26"	700	88.4		208,	277, 480,		
	3.0	26"	44"	26"	800	102		240,	120/240		
	3.4	26"	44"	26"	800	115.6		277	or		
	3.8	26"	44"	26"	800	129.2		or	120/277		
4.2	26"	44"	26"	920	142.8	480					

The Cobra Plus provides the simplicity and reliability that is critical when providing an alternative source of power to any environment. Easy installation ..."simplicity"...connect the Plus to the emergency circuit(s) and everything is backed up..."reliability"...during a power outage. All lighting connected to the Plus will simply continue to operate at "full light output" once the transfer is complete. DSPM Watchdog© software keeps your environment safe while self-diagnostics help maintain equipment to a high standard. Superior surge suppression assures the highest quality of power being delivered to all loads, all the time.

We sincerely hope you never experience a real emergency, but if you do, you deserve the **security, safety and peace of mind** that the Cobra Plus from **DSPM** ensures.

ORDERING INFORMATION

Choose the bold face catalog nomenclature that best suites your needs.

Write them on the appropriate line. Order accessories as separate catalog number.

Example:

CPLUS - 4.2 - 277/277 - ECM277/3 OCB/277/3 - 90

Description of example:

(4.2 KW, 277 Voltage In, 277 Voltage Out, 3 277V Environmental Control Modules, 3 Output 277 Voltage Circuit Breakers, 90 minute run time)

CPLUS		VOLTAGE ¹		OPTIONS		TIME ³
FAMILY	POWER RATING	Input/Output	Input/Output			Minutes
	KW	120/120	240/120-240	ECM120 - 120V Environmental control module ² /qty		5
	2.4	120/208	240/120-277	ECM277 - 277V Environmental control module ² /qty		10
	2.6	120/277	277/120	NOF120 - Normally OFF output circuit / qty		15
	3.0	120/480	277/208	NOF277 - Normally OFF output circuit / qty		20
	3.4	120/120-240	277/277	NOH120 - Normally OFF "Hold ON"/qty		25
	3.8	120/120-277	277/480	NOH277 - Normally OFF "Hold ON"/qty		30
	4.2	208/120	277/120-240	OCB - 20 Amps output circuit breakers /voltage /quantity		45
		208/208	277/120-277	EPO - Emergency power off		60
		208/277	480/120	RSSP - Remote Indicator Panel		90 (Standard)
		208/480	480/208	SNMP - SNMP Card		120
		208/120-240	480/277	FAX - Fax Modem		180
		208/120-277	480/480	FC - Form C Contacts		240
		240/120	480/120-240	SRB - Seismic rated bracket		
		240/208	480/120-277	STU1 - Onsite start-up		
		240/277		IDB - Internal dimmer bypass		
		240/480		EMB - External maintenance bypass switch		
				EW - Extended warranty		
				FT - Fast transfer		

NOTES:

- 1-Consult factory for other voltage requirements. Special voltages may effect the weight, size and number of cabinets.
 - 2-One ECM is used per switching device or circuit.
 - 3-Consult factory for other run times.
- Specifications subject to change without notice.



1921 S. Quaker Ridge Place
Ontario, CA 91761
Ph: 1.877.DSPM POWER
1.877.377.6769
Fax: 909.930.3335