

FORTRESS 3

HARSH



SPECIFICATIONS

The Fortress Harsh 3 maintains efficient AC Emergency Power to operate all emergency lighting fixtures at "full-light" output, providing superior dependability and security to commercial/industrial environments in an outdoor environment.

POWER RATING

- 3 KW - 125 KW (or 3,000 Watts - 125,000 Watts) three phase output unit uses the latest DSP/PWM technology to provide the most advanced performance and reliability features

INPUT

- 208Y/120, 480Y/277, 208 or 480VAC input 60Hz

OUTPUT

- 208Y/120 or 480Y/277VAC True "on-line" design is ≥92% efficient at 100% linear load

BATTERIES


- Sealed, maintenance-free, lead calcium (AGM) batteries
- 10-Year prorated warranty
- DSP/PWM Smart Battery Monitoring System is **TEMPERATURE COMPENSATED** maintaining maximum runtime and battery life
- Microprocessor controlled recharge and DSP/PWM overcharge protection standard

LAMPS AND LOADS

- Emergency power provides **FULL LIGHT OUTPUT** from all lamps and fixtures for the entire runtime
- Operates fluorescent, compact fluorescent, incandescent, quartz, H.I.D., LED and other lamp types
- Standard or electronic ballasts, dimming devices or panels, sensors and most control equipment
- Standard or LED Exits and other safety equipment

CODES

- Listed to UL 924, meets NFPA 101, NFPA 70, NEC and OSHA standards
- Cities of Chicago and New York approved
- Complies with the Buy American Act

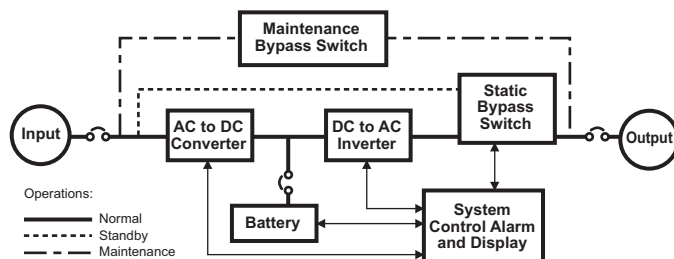

Catalog Number	
Project	Notes
Signature	Date

3 KW - 125 KW

Three Phase

**Uninterrupted
Emergency
Lighting and
Power
Systems**



PROTECTION

- Provides overload, surge and undercurrent protection using DSP/PWM technology and DSPM *Watchdog Software* to protect system performance and reliability
- Surge protection against load surges as defined in ANSI/IEEE C62.45 category A and B

DIAGNOSTICS AND MAINTENANCE

- DSP/PWM technology and DSPM *Watchdog Software* provides complete self diagnostic capabilities and LED Monitoring
- Informative advanced Display and Alarms keep you in control of your emergency lighting environment 24/7
- Automatically performs periodic self-tests ensuring a safely lighted environment *prior* to an emergency
- Single point of testing instead of multiple testing points with battery packs

NEMA 4X or 12 CABINET

- Modular design enables flexible installation
- Forced air cooling for maximum reliability
- Systems up to 10 KW are self contained; larger systems require external battery cabinet(s)

INSTALLATION

- Modular design and small footprint allow easy installation in an outdoor environment
- Phone assisted factory start-up standard for all systems
- Extended warranty available

SPECIAL APPLICATIONS

- DSPM offers numerous UL924 optional devices to meet unusual or difficult application parameters
- ECM - Environmental Circuit Module allows fixtures and lamps on the emergency circuit(s) to be operated by normal switching and/or dimming devices in NON-emergency conditions
- Dimming Panel Interface allows use with emergency lights controlled by common dimmer panel

WARRANTY

- 1-Year full warranty on system electronics
- Battery warranty 1-year with 9-years pro-rated
- System 1-year on-site warranty labor with DSPM phone assisted start-up
- 5-Year powertrain warranty
- Maintenance contracts available

FORTRESS 3 HARSH



Fortress Harsh 3	Power Rating	UPS			Battery			Weight (combined)	British Thermal Unit	Battery Type	Voltage (VAC)		Output Protection	Safety Approvals
		Cabinet Dimensions			Cabinet Dimensions						Input	Output		
FTH3 (Consult factory for other capabilities)	KVA/KW	W	H	D	W	H	D	(lbs)	BTU's	Sealed, Maintenance free (AGM) lead calcium	<i>Select</i> 208Y/120VAC, 480Y/277VAC, 208 or 480VAC (Consult factory for others)	Input and output circuit breakers standard	UL924 NFPA 101 NFPA 70 NEC	
	3	41"	48"	32"	not required			1730	816					
	4.5	41"	72"	32"	not required			1850	1224					
	6	41"	72"	32"	not required			2100	1632					
	8	41"	72"	32"	not required			2450	2176					
	10	41"	72"	32"	not required			3000	2720					
	12	41"	72"	32"	41"	72"	32"	3450	3264					
	16	41"	72"	32"	41"	72"	32"	3700	4352					
	20	41"	72"	32"	41"	72"	32"	4550	5440					
	24	Consult Factory							6528					
	30	Consult Factory							8160					
	40	Consult Factory							10880					
	60	Consult Factory							16320					
	80	Consult Factory							21760					
100	Consult Factory							27200						
125	Consult Factory							34000						

We sincerely hope you never experience a real emergency, but if you do, you deserve the **security, safety and peace of mind** that the Fortress Harsh 3 from **DSPM** ensures.

ORDERING INFORMATION

Choose the bold face catalog nomenclature that best suites your needs. Write them on the appropriate line. Order accessories as separate catalog number.

Example:

FTH3 - 12.0 - 208Y/120 208Y/120 - EMB OCB/120/3 - 240

Description of example:

(12.0 KW, 208Y/120 Voltage In, 208Y/120 Voltage Out, External Maintenance Bypass Switch, 3 Output 120 Voltage Circuit Breakers, 240 minute run time)

FTH3	FAMILY	POWER RATING	VOLTAGE ¹	OPTIONS	TIME ³
		<u>KW</u>	<u>Input/Output</u>	<u>ECM120</u> - 120V Environmental control module ² /qty	<u>Minutes</u>
		3.0	208Y/120 - 208Y/120	<u>ECM277</u> - 277V Environmental control module ² /qty	5
		4.5	208Y/120 - 480Y/277	<u>NOF120</u> - Normally OFF output circuit / qty	10
		6.0	480Y/277 - 208Y/120	<u>NOF277</u> - Normally OFF output circuit / qty	15
		8.0	480Y/277 - 480Y/277	<u>NOH120</u> - Normally OFF "Hold ON"/qty	20
		10.0	208 - 208Y/120	<u>NOH277</u> - Normally OFF "Hold ON"/qty	25
		12.0	208 - 480Y/277	<u>OCB</u> - 20 Amps output circuit breakers / voltage / quantity	30
		16.0	480 - 208Y/120	<u>EPO</u> - Emergency power off	45
		20.0	480 - 480Y/277	<u>RSSP</u> - Remote Indicator Panel	60
		24.0		<u>EIR</u> - Ethernet Interface with RS232	90 (Standard)
		30.0		<u>FAX</u> - Fax Modem	120
		40.0		<u>FC</u> - Form C Contacts	180
		60.0		<u>STU3</u> - Onsite start-up	240
		80.0		<u>IDB</u> - Internal dimmer bypass	
		100.0		<u>EMB</u> - External maintenance bypass switch	
		125.0		<u>HTR</u> - Heater	
				<u>EW</u> - Extended warranty	

NOTES:

1-Consult factory for other voltage requirements. Special voltages may effect the weight, size and number of cabinets.

2-One ECM is used per switching device or circuit.

3-Consult factory for other run times.

Specifications subject to change without notice.



1921 S. Quaker Ridge Place
Ontario, CA 91761
Ph: 1.877.DSPM POWER
1.877.377.6769
Fax: 909.930.3335