



COBRA 3

SPECIFICATIONS

- The Cobra 3 maintains efficient AC Emergency Power to operate all emergency lighting fixtures at “fulllight” output after the transfer is complete, providing superior dependability and security to commercial/industrial environments in a small footprint.

DIAGNOSTICS AND MAINTENANCE

- DSP/PWM technology and DSPM Watchdog Software provides complete self diagnostic capabilities and LCD Monitoring
- Informative advanced Display and Alarms keep you in control of your emergency lighting environment 24/7
- Automatically performs periodic self-tests ensuring a safely lighted environment prior to an emergency
- Single point of testing instead of multiple testing points with battery packs

POWER RATING

- 3 KW - 125 KW (or 3,000 Watts - 125,000 Watts) three phase output unit uses the latest DSP/PWM technology to provide the most advanced performance and reliability feature

INPUT

- 208Y/120, 480Y/277, 208 or 480VAC input 60Hz

OUTPUT

- 208Y/120 or 480Y/277VAC Stand-by design is ≥99% efficient at 100% linear load

CODES

- UL 924, UL 1778, meets NFPA 101, NFPA 70, NEC and OSHA standards
- Cities of Chicago and New York approved
- Complies with the Buy American Act

BATTERIES

- Sealed, maintenance-free, lead calcium (AGM) batteries
- 10-Year prorated warranty
- DSP/PWM Smart Battery Monitoring System is TEMPERATURE COMPENSATED maintaining maximum runtime and battery life
- Microprocessor controlled recharge and DSP/PWM overcharge protection standard

INSTALLATION

- Modular design and small footprint allow easy installation in electrical closet or other convenient locations
- Phone assisted factory start-up standard for all systems
- Extended warranty available

LAMPS AND LOADS

- Emergency power provides FULL LIGHT OUTPUT from all lamps and fixtures for the entire runtime
- Operates fluorescent, compact fluorescent, incandescent, quartz, LED and other lamp types
- Standard or electronic ballasts, dimming devices or panels, sensors and most control equipment
- Standard or LED Exits and other safety equipment

WARRANTY


- 1-Year full warranty on system electronics
- Battery warranty 1-year with 9-years pro-rated
- System 1-year on-site warranty labor with DSPM phone assisted start-up
- 5-Year powertrain warranty
- Maintenance contracts available

SPECIAL APPLICATIONS

- DSPM offers numerous UL924 optional devices to meet unusual or difficult application parameters
- ECM - Environmental Circuit Module allows fixtures and lamps on the emergency circuit(s) to be operated by normal switching and/or dimming devices in NON-emergency conditions
- Dimming Panel Interface allows use with emergency lights controlled by common dimmer panel



3 kVA - 125 kVA
 Three Phase
 Outdoor
 Uninterrupted
 Power
 Systems

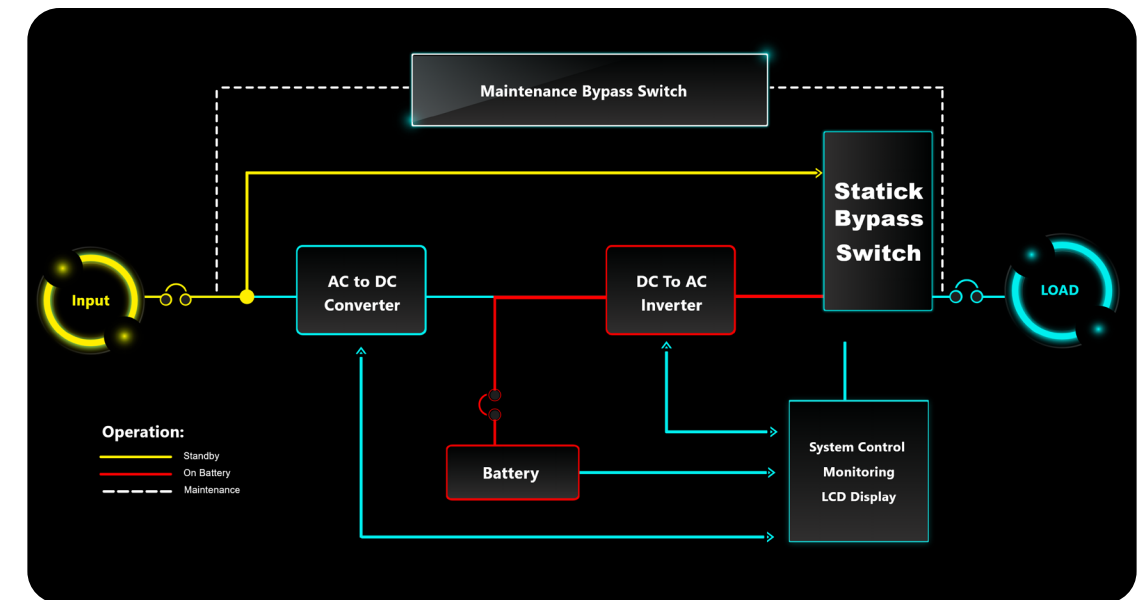

Cobra 3 Series	Power Ratings	UPS			Battery				Weight	British Thermal Unit	Battery Type	Voltage (VAC)		Output Protection	Safety Approvals
		Cabinet Dimensions			Cabinet Dimensions							Input	Output		
CO3	kVA/KW	W	H	D	No.	W	H	D	(lbs)	BTU s	Sealed, Maintenance free (AGM) lead calcium	Select 208Y/120VAC, 480Y/277VAC, 208 or 480VAC (Consult factory for others)	Input and output circuit breakers standard	UL924 UL1778 NFPA 101 NFPA 70 NEC	
	3	42"	71"	22.5"	not required				980	102					
	4.5	42"	71"	22.5"	not required				1100	153					
	6	42"	71"	22.5"	not required				1350	204					
	8	50"	71"	32"	1	42"	71"	22.5"	1700	272					
	10	42"	71"	22.5"	1	42"	71"	22.5"	2250	340					
	12	42"	71"	22.5"	1	42"	71"	22.5"	2700	408					
	16	42"	71"	22.5"	1	42"	71"	22.5"	2950	544					
	20	42"	71"	22.5"	1	50"	71"	32"	3800	680					
	24	42"	71"	22.5"	2	42"	71"	22.5"	4350	816					
	30	42"	71"	22.5"	2	42"	71"	22.5"	5150	1020					
	40	42"	71"	22.5"	3	42"	71"	22.5"	6790	1360					
	50	50"	71"	32"	2	50"	71"	32"	8384	1700					
	60	50"	71"	32"	Consult Factory					2040					
	80	50"	71"	32"	Consult Factory					2720					
	100	50"	71"	32"	Consult Factory					3400					
125	50"	71"	32"	Consult Factory					4250						

The Cobra 1 provides the simplicity and reliability that is critical when providing an alternative source of power to any environment. Easy installation ..."simplicity"...connect the CO1 to the emergency circuit(s) and everything is backed up..."reliability"...during a power outage. All lighting connected to the CO1 will simply continue to operate at "full light output" once the transfer is complete. DSPM Watchdog® software keeps your environment safe while self-diagnostics help maintain equipment to a high standard. Superior surge suppression assures the highest quality of power being delivered to all loads, all the time We sincerely hope you never experience a real emergency, but if you do, you deserve the security, safety and peace of mind that the Cobra 1 from DSPM ensures

ORDERING INFORMATION

Choose the bold face catalog nomenclature that best suites your needs.

Write them on the appropriate line. Order accessories as separate catalog number.

Example:

CO3 - 12.0 - 208Y/120 208Y/120- EMB OCB/120/3/20/1 - 240

Description of example:

(12.0 KW, 208Y/120 Voltage In, 208Y/120 Voltage Out, External Maintenance Bypass Switch, 3 Output 120 Voltage Circuit Breakers at 20amps, 2 pole, 240 minute run time)

CO3				
FAMILY	POWER RATING	VOLTAGE ¹	OPTIONS	TIME ³
	<u>KW</u>	<u>Input - Output</u>	<u>ECM120 - 120V Environmental control module² qty</u>	<u>Minutes</u>
	3.0	208Y/120 - 208Y/120	ECM277 - 277V Environmental control module ² qty	5
	4.5	208Y/120 - 480Y/277	NOF - Normally OFF output circuit/voltage / qty/pole	10
	6.0	480Y/277 - 208Y/120	NOH - Normally OFF "Hold ON"/voltage/qty/pole	15
	8.0	480Y/277 - 480Y/277	OCB - Output circuit breakers / voltage / quantity/amps/pole	20
	10.0	208 - 208Y/120	EPO - Emergency power off	25
	12.0	208 - 480Y/277	RSSP - Remote Indicator Panel	30
	16.0	480 - 208Y/120	SNMP - SNMP Card	45
	20.0	480 - 480Y/277	FC - Form C Contacts	60
	24.0		SRB - Seismic rated bracket	90 (Standard)
	30.0		STU3 - Onsite start-up	120
	40.0		IDB - Internal dimmer bypass	180
	60.0		EMB - External maintenance bypass switch	240
			EW - Extended warranty	240

NOTES:

1-Consult factory for other voltage requirements.

Special voltages may effect the weight, size and number of cabinets.

2-One ECM is used per switching device or circuit.

3-Consult factory for other run times.

Specifications subject to change without notice