



## SPECIFICATIONS

The Defender Mini maintains efficient AC Emergency Power to operate all emergency lighting fixtures at “full-light” output, providing superior dependability and security to commercial/industrial environments in a small footprint.

### POWER RATING

- 350 Watts - 2000 Watts single phase output unit uses the latest DSP/PWM technology to provide the most advanced performance and reliability features

### INPUT

- 120V, 208V, 240V or 277V input 60Hz

### OUTPUT

- 120V, 240V, 277V, 120/240 or 120/277VAC. True “on-line” design is ≥92% efficient at 100% linear load

### BATTERIES


- Sealed, maintenance-free, lead calcium (AGM) batteries
- 10-Year prorated warranty
- DSP/PWM Smart Battery Monitoring System is **TEMPERATURE COMPENSATED** maintaining maximum runtime and battery life
- Microprocessor controlled recharge and DSP/PWM overcharge protection standard

### LAMPS AND LOADS

- Emergency power provides **FULL LIGHT OUTPUT** from all lamps and fixtures for the entire runtime
- Operates fluorescent, compact fluorescent, incandescent, quartz, H.I.D., LED and other lamp types
- Standard or electronic ballasts, dimming devices or panels, sensors and most control equipment
- Standard or LED Exits and other safety equipment

### CODES

- Listed to UL 924, meets NFPA 101, NFPA 70, NEC and OSHA standards
- Cities of Chicago and New York approved

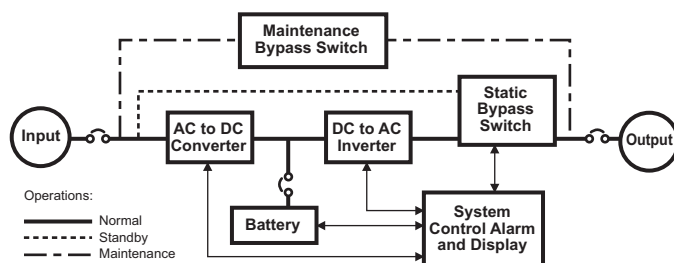

|                |       |
|----------------|-------|
| Catalog Number |       |
| Project        | Notes |
| Signature      | Date  |

**350 W - 2000 W**

**Single Phase**

**Uninterrupted  
Emergency  
Lighting and  
Power  
Systems**



### PROTECTION

- Provides overload, surge and undercurrent protection using DSP/PWM technology and DSPM *Watchdog Software* to protect system performance and reliability
- Surge protection against load surges as defined in ANSI/IEEE C62.45 category A and B

### DIAGNOSTICS AND MAINTENANCE

- DSP/PWM technology and DSPM *Watchdog Software* provides complete self diagnostic capabilities and LED Monitoring
- Informative advanced Display and Alarms keep you in control of your emergency lighting environment 24/7
- Automatically performs periodic self-tests ensuring a safely lighted environment *prior* to an emergency
- Single point of testing instead of multiple testing points with battery packs

### CABINET

- Space saving small footprint
- Modular design enables flexible installation

### INSTALLATION

- Modular design and small footprint allow easy installation in electrical closet or other convenient locations
- Phone assisted factory start-up standard for all systems
- Extended warranty available

### SPECIAL APPLICATIONS

- DSPM offers numerous UL924 optional devices to meet unusual or difficult application parameters
- ECM - Environmental Circuit Module allows fixtures and lamps on the emergency circuit(s) to be operated by normal switching and/or dimming devices in NON-emergency conditions
- Dimming Panel Interface allows use with emergency lights controlled by common dimmer panel

### WARRANTY

- 1-Year full warranty on system electronics
- Battery warranty 1-year with 9-years pro-rated
- System 1-year on-site warranty labor with DSPM phone assisted start-up
- 5-Year powertrain warranty
- Maintenance contracts available



| Mini Series | Power Rating | UPS                |     |     | Weight | Battery Type                                | Voltage (VAC) |               | Output Protection                          | Safety Approvals                    |
|-------------|--------------|--------------------|-----|-----|--------|---|---------------|---------------|--|-------------------------------------|
|             |              | Cabinet Dimensions |     |     |        |   | Input         | Output        |  |                                     |
| DMINI       | VA/W         | W                  | H   | D   | (lbs)  | Sealed, Maintenance free (AGM) lead calcium | <u>Select</u> | <u>Select</u> | Input and output circuit breakers standard | UL924<br>NFPA 101<br>NFPA 70<br>NEC |
|             | 350          | 24"                | 26" | 16" | 340    |   | 120,          | 120,          |  |                                     |
|             | 525          | 24"                | 26" | 16" | 340    |   | 208,          | 277,          |  |                                     |
|             | 700          | 24"                | 26" | 16" | 370    |   | 240           | 120/240       |  |                                     |
|             | 750          | 24"                | 26" | 16" | 370    |   | or            | or            |  |                                     |
|             | 875          | 24"                | 26" | 16" | 370    |   | 277           | 120/277       |  |                                     |
|             | 1050         | 24"                | 26" | 16" | 440    |   |               |               |  |                                     |
|             | 1400         | 24"                | 26" | 16" | 460    |   |               |               |  |                                     |
| 2000        | 24"          | 26"                | 16" | 600 |        |   |               |               |  |                                     |

The *Defender Mini* provides the simplicity and reliability that is critical when providing an alternative source of power to any environment. Easy installation ..."simplicity"...connect the Mini to the emergency circuit(s) and everything is backed up..."reliability"...during a power outage. All lighting connected to the Mini will simply continue to operate at "full light output". DSPM Watchdog© software keeps your environment safe while self-diagnostics help maintain equipment to a high standard. Superior surge suppression assures the highest quality of power being delivered to all loads, all the time. Equipment and lamp life are maximized.

We sincerely hope you never experience a real emergency, but if you do, you deserve the **security, safety and peace of mind** that the *Defender Mini* from **DSPM** ensures.

## ORDERING INFORMATION

Choose the bold face catalog nomenclature that best suites your needs.

Write them on the appropriate line. Order accessories as separate catalog number.

Example:

**DMINI - 1050 - 208/120 - OCB/120/3 NOF120/1**

Description of example:

(1050 Watt, 208 Voltage In, 120 Voltage Out, 3 Output 120 Voltage Circuit Breakers, 1 Normally Off Output Circuit)

| DMINI  |              |                      |  |
|--------|--------------|----------------------|--|
| FAMILY | POWER RATING | VOLTAGE <sup>1</sup> | OPTIONS  |
|        | VA/W         | Input/Output         |  |
|        | 350          | 120/120              | ECM120 - 120V Environmental control module <sup>2</sup> /qty |
|        | 525          | 120/277              | ECM277 - 277V Environmental control module <sup>2</sup> /qty |
|        | 700          | 120/120-240          | NOF120 - Normally OFF output circuit / qty                   |
|        | 750          | 120/120-277          | NOF277 - Normally OFF output circuit / qty                   |
|        | 875          | 208/120              | NOH120 - Normally OFF "Hold ON"/qty                          |
|        | 1050         | 208/277              | NOH277 - Normally OFF "Hold ON"/qty                          |
|        | 1400         | 208/120-240          | OCB - 20 Amps output circuit breakers / voltage / quantity   |
|        | 2000         | 208/120-277          | SRM - Seismic rated bracket                                  |
|        |              | 240/120              | STUM - Onsite start-up                                       |
|        |              | 240/277              | IDB - Internal dimmer bypass                                 |
|        |              | 240/120-240          | EMB - External maintenance bypass switch                     |
|        |              | 240/120-277          | EW - Extended warranty                                       |
|        |              | 277/120              |  |
|        |              | 277/277              |  |
|        |              | 277/120-240          |  |
|        |              | 277/120-277          |  |

### NOTES:

1-Consult factory for other voltage requirements. Special voltages may effect the weight, size and number or cabinets.

2-One ECM is used per switching device or circuit.

Specifications subject to change without notice.



1921 S. Quaker Ridge Place  
Ontario, CA 91761  
Ph: 1.877.DSPM POWER  
1.877.377.6769  
Fax: 909.930.3335